

USER GUIDE

Model: Alpha 100

HULKMAN

4000A
PEAK AMPS

32,000mAh
ULTRA-LARGE BATTERY CAPACITY

10L
GAS

10L
DIESEL

STEPS TO JUMP START YOUR VEHICLE



Step 1

Insert the jumper cable into the booster and connect the clamps to the car battery.



Step 2

"READY" sign shows on the screen.





Step 3

Start your car engine.

ABOUT THE FORCE START FUNCTION

Why the screen shows nothing when you try to start your car ?

If the screen doesn't display anything when you have correctly connected the clamps to your car, it means that your battery voltage is extremely low, you can use the Force Start Function to enter boost mode.

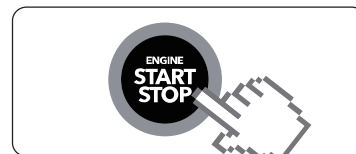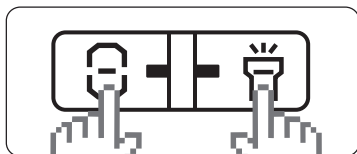

3 steps to fix your problem:


1. Check the clamps connection and the product's battery is above 20%.
2. Press the Power Button and Flashlight Button simultaneously for 2-3 seconds.
3. The screen shows "READY", and go back to start engine ignition.

WARNING: WHEN USING THE FORCE START FUNCTION, AUTO-DETECTION AND SAFETY FEATURES WILL BE DISABLED.

ABOUT THE ERROR CODES

Error Code	Reason	Solution
	"+" and "-" poles of battery clamps reversed.	Reverse the clamps and ensure the correct connection.
	The voltage of the car battery is between 2-8V.	Press the Power Button and Flashlight Button simultaneously for 2-3s to start force output. (Force Start Function)
	<ul style="list-style-type: none">• The product's operating temperature is too high. ($\geq 113^{\circ}\text{F}$)• Charge the device at extremely low or high temperature.	<ul style="list-style-type: none">• Please store it back to where the temperature is between -40°F to 113°F.• Please charge the device at room temperature.
	Jump start the battery more than 5 times within 10 minutes, the product will automatically enter the safe mode.	The safe mode will be off automatically after 10 minutes waiting. (Please do not turn off the product during the process)

ABOUT DUAL USB-A OUTPUT PORTS:

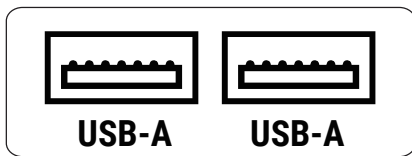


1. Plug the cable into the USB-A output port.




2. Press the Power Button.

ABOUT 12V DC OUTPUT PORT (MAX 15V/10A)

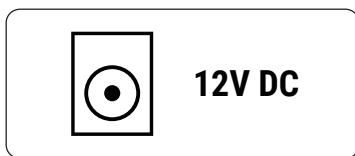

1. Plug the 12V cigarette lighter socket adapter into the 12V DC output port.

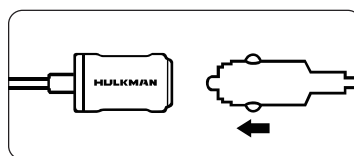


2. Connect your 12V DC appliances to the cigarette lighter adapter.



3. Press the Power Button.


ABOUT LED FLASHLIGHT

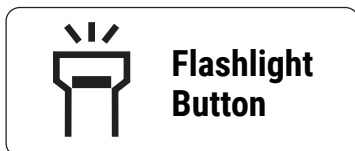

1. Hold the Flashlight Button for 1-2s.

2. Press briefly to switch the light modes. •50% Lumen Light → 100% Lumen Light → White Strobe Light → White SOS Light → Red Strobe Light

ABOUT PRE-HEAT TECH

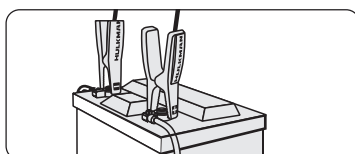

1. Insert the jumper cable into the jump starter and connect the clamps to the car battery.



2. The Pre-Heat Function will operate automatically and the icon will be displayed on the screen when the detected temperature is below the ideal operating temperature.



3. The screen will show "READY" after preheating, then start your car engine.

CONTACT US

<https://support.hulkman.com>

46 Smith Alley, Suite 200 Pasadena, CA 91103

+1 (877) 892-9703

service@hulkman.com